

LOCATE US

BRANCH OFFICE & COMPANY DISPLAY CENTER

AHMEDABAD OFFICE & CDC:

Shop No.102, Sarthik Square, Nr. Pakwan Circle, S G Highway, Ahmedabad, Gujarat
Mo.: +91 75730 04091 | E-mail: cdc.ahm@exxarotiles.com

MUMBAI OFFICE & CDC:

K / 21, Ground Floor, Laxmi Industrial Estate, New Link Road, Andheri (West), Mumbai - 53.
Ph: +91 22 42645555 | E-mail: cdc.mumbai@exxarotiles.com

BANGALORE OFFICE & CDC:

42/14, 3rd cross, 5th block, SSI Area, Rajaji Nagar, Bangalore - 560010
Mo: +91 80 23113972 | E-mail: cdc.bangalore@exxarotiles.com

CHENNAI OFFICE & CDC:

Old no. 340, New no7, 8th Avenue Ashok nagar, Chennai 60083.
Ph.: +91 44 4203 8555 | E-mail: cdcchennai@exxarotiles.com

COCHIN OFFICE & CDC:

1st Floor, Door no 40/495 Mamangalam Southern side of Mamangalam
pottakuzhi Near S. N. Auditorium, Edappally South, Palarivattom Po, Ernakulam - 682025, Kerala
Ph.: +91 48 44019555 | E-mail: cochin@exxarotiles.com

DELHI OFFICE:

B-230, NorthEx Mall, Sector-9, Rohini, Delhi - 110085
Mo.: +91 93104 01101 | Email: delhi@exxarotiles.com

BHUBANESHWAR OFFICE:

Gomati Devi Residency, Flat No 002, N.H-5, Near H.P. Petrol Pump, Rasulgarh,
Bhubaneswar -751010 (Odisha)
Mo.: +91 73810 55075

EXXARO TILES LIMITED

CIN: L26914GJ2008PLC052518

Regd. Office & Unit-2

Survey No. 169 & 170, Vavdi Harsol Road, At & Po.: Mahelav,
Taluka: talod, Sabarkantha - 383 305, Gujarat, India.

Unit-1

Block No. 204/205, Opp. Hanuman Temple, Nr. Mahuvad Turning,
At & Po. Dabhasa, Tal. Padara, Dist. Vadodara - 391 440, Gujarat, India.

Web: www.exxarotiles.com | **Email:** info@exxarotiles.com

Ph No.: +91 75758 15555 | +91 75758 25555 | +91 75758 35555 | +91 75758 45555



concept zone: +91 98251 53995

www.exxarotiles.com



INTRODUCING

SPANZIA

COLLECTION



600x1200mm | 600x600mm
Matt Surface



Exxaro Philosophy

Exxaro Tiles is all set to go on a remarkable and never ending journey of excellence in the Tiles Industry. To add energy and vigor to this journey, it is equipped with state of the art infrastructure comprising best of machinery, resources and manpower. we are located at a huge plant established at the most advantageous location of Gujarat. Exxaro Tiles brings you the convenience of comprehensive tiling solutions under one roof. With its meticulously crafted innovative tiling solutions, Exxaro Tiles is winning accolades and trust of clients across the world.



A NEW PERSPECTIVE OF NATURE

A simple yet elegant collection that will surely make a style statement with its unmatched appeal.

Our Exploration

Whatever the living style to be interpreted, EXXARO offers a wealth of colours, materials and decorations to furnish and decorate any home, even the most prestigious, with tailor made solution. The assortment of sizes, thickness and finishes guarantees tailor-made solutions for all the technical demands of the building: indoors, outdoors, floors and wall coverings, coordinated in a single colours or mixing different material looks. This constant commitment creates products that stretch well beyond the concept of a collection , offering versatile furnishing surface solution for contemporary architecture.

INTRODUCING

SPANZIA

COLLECTION

A New Perspective of Nature
in Contemporary Style



SPANZIA
COLLECTION



Designed exclusively

600x1200mm SPANZIA COLLECTION

The Art of Italian

Nature is eternal & the beauty of it is omnipresent. Inspired by the many facets of beautiful nature, we present to you this collection that incorporates some inherent nature traits like pristine charm, eternal strength and forever elegance very fluidly. Through this collection we are celebrating the wonderful nature in many marvelous avatars.

APPLICATION AREAS



SCHOOL AND
COLLEGE



CORPORATE
OFFICE



HOTEL AND
RESTAURANT



OFFICE AND
LOUNGE



SPA AND
SALON



TOILET



RESIDENTIAL



BANK



HOSPITAL



CAFÉ



Advance Technical Feature



Easy to Lay,
Cut and
Drill



Easy to
Install



Fewer Joints,
Greater Laying
Continuity



Easy Cleaning
and Care



Ideal Beauty
& Technology



Lightweight
Easily Handled



Suitable for
Contact with
Food



Hygienic



Light-fast
Colors



Bending
Strength



Resistance
to Stains



Frost
Resistance



Fire
Resistance



Resistance
to deep
Abrasion



Resistance
to Acids
and Bases



Resistant to
Thermal
Shock



Suitable for
Heavy Traffic
Area

CREATIVE IDENTITY FOR CONTEMPORARY SPACES

Creativity is craved by the entire world. An ultimate universal process is a creation, be it a thought or any living thing. Our tiles are created with unique designs filled with creativity. The freshest stock of innovative concocts are gathered here specially for you to enrich your spaces in the most innovative patterned options.

INDEX PAGE NO.

ANTICO SERIES	08
CARMELLA SERIES	14
DYNAMIK SERIES	20
REVEN SERIES	26
SYON SERIES	32
TOSCANA SERIES	38
VOYAGE SERIES	44

ANTICO


Antico Ash



ANTICO SERIES

06


COLOURS SHADES

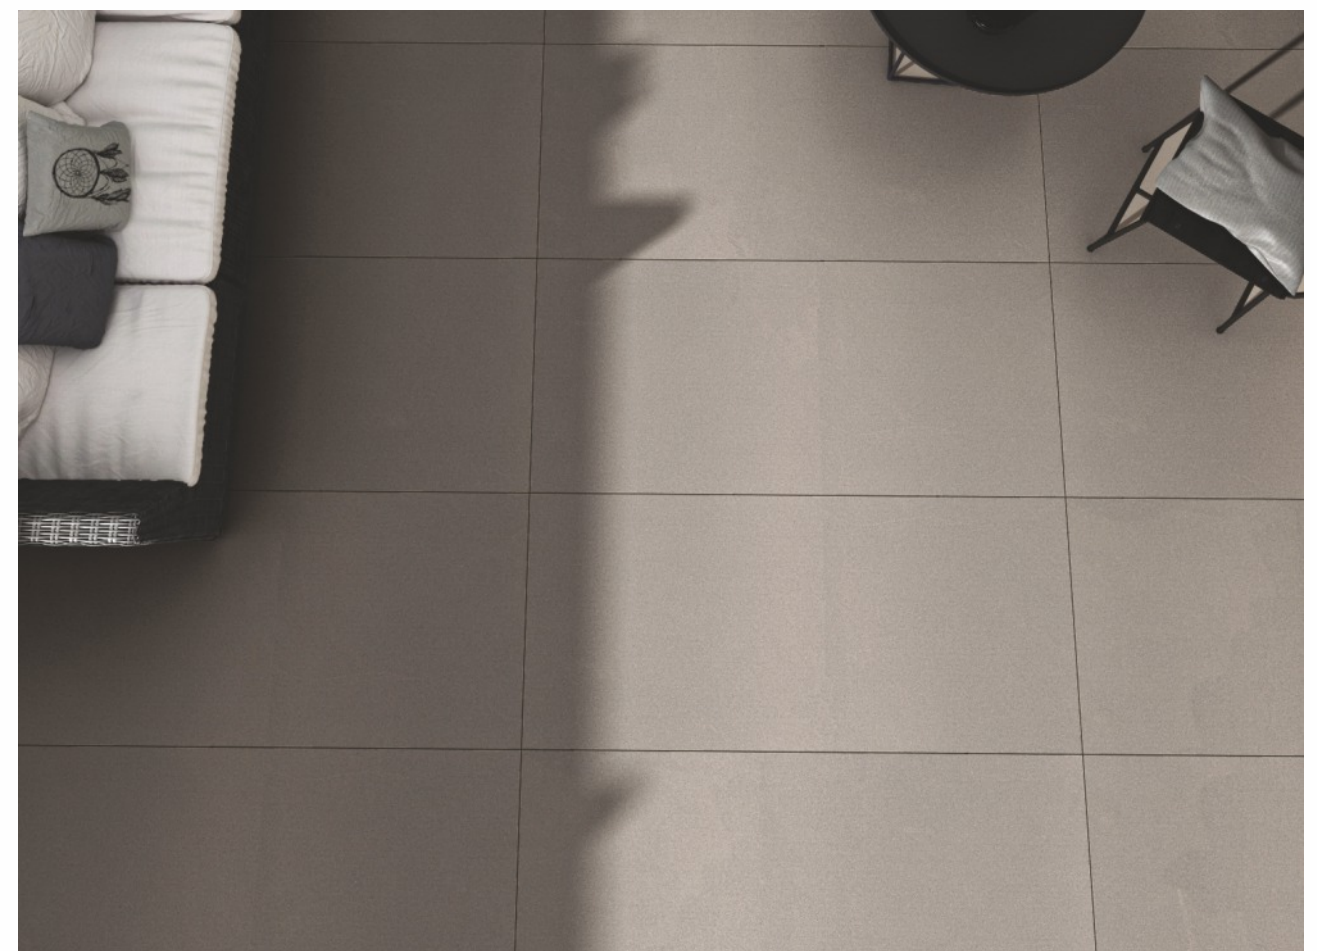


Antico Ash



ANTICO BEIGE

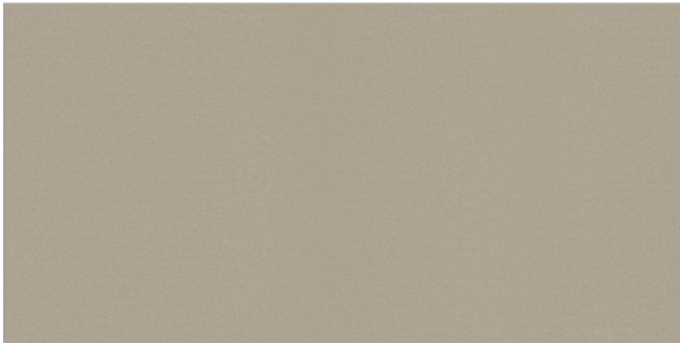

ANTICO OLIVE

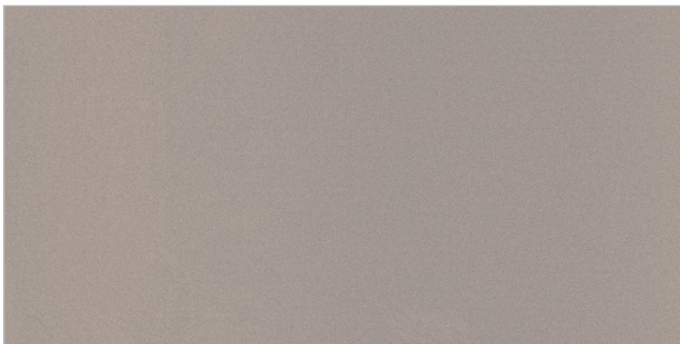

ANTICO ASH

Antico Ash



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes





ANTICO SMOKE



ANTICO GRIS



ANTICO NERO

Antico Gris



Flat Glazed Vitrified Tiles


SURFACES : Matt

Available sizes

60x
60cm

60x
120cm

CARMELLA

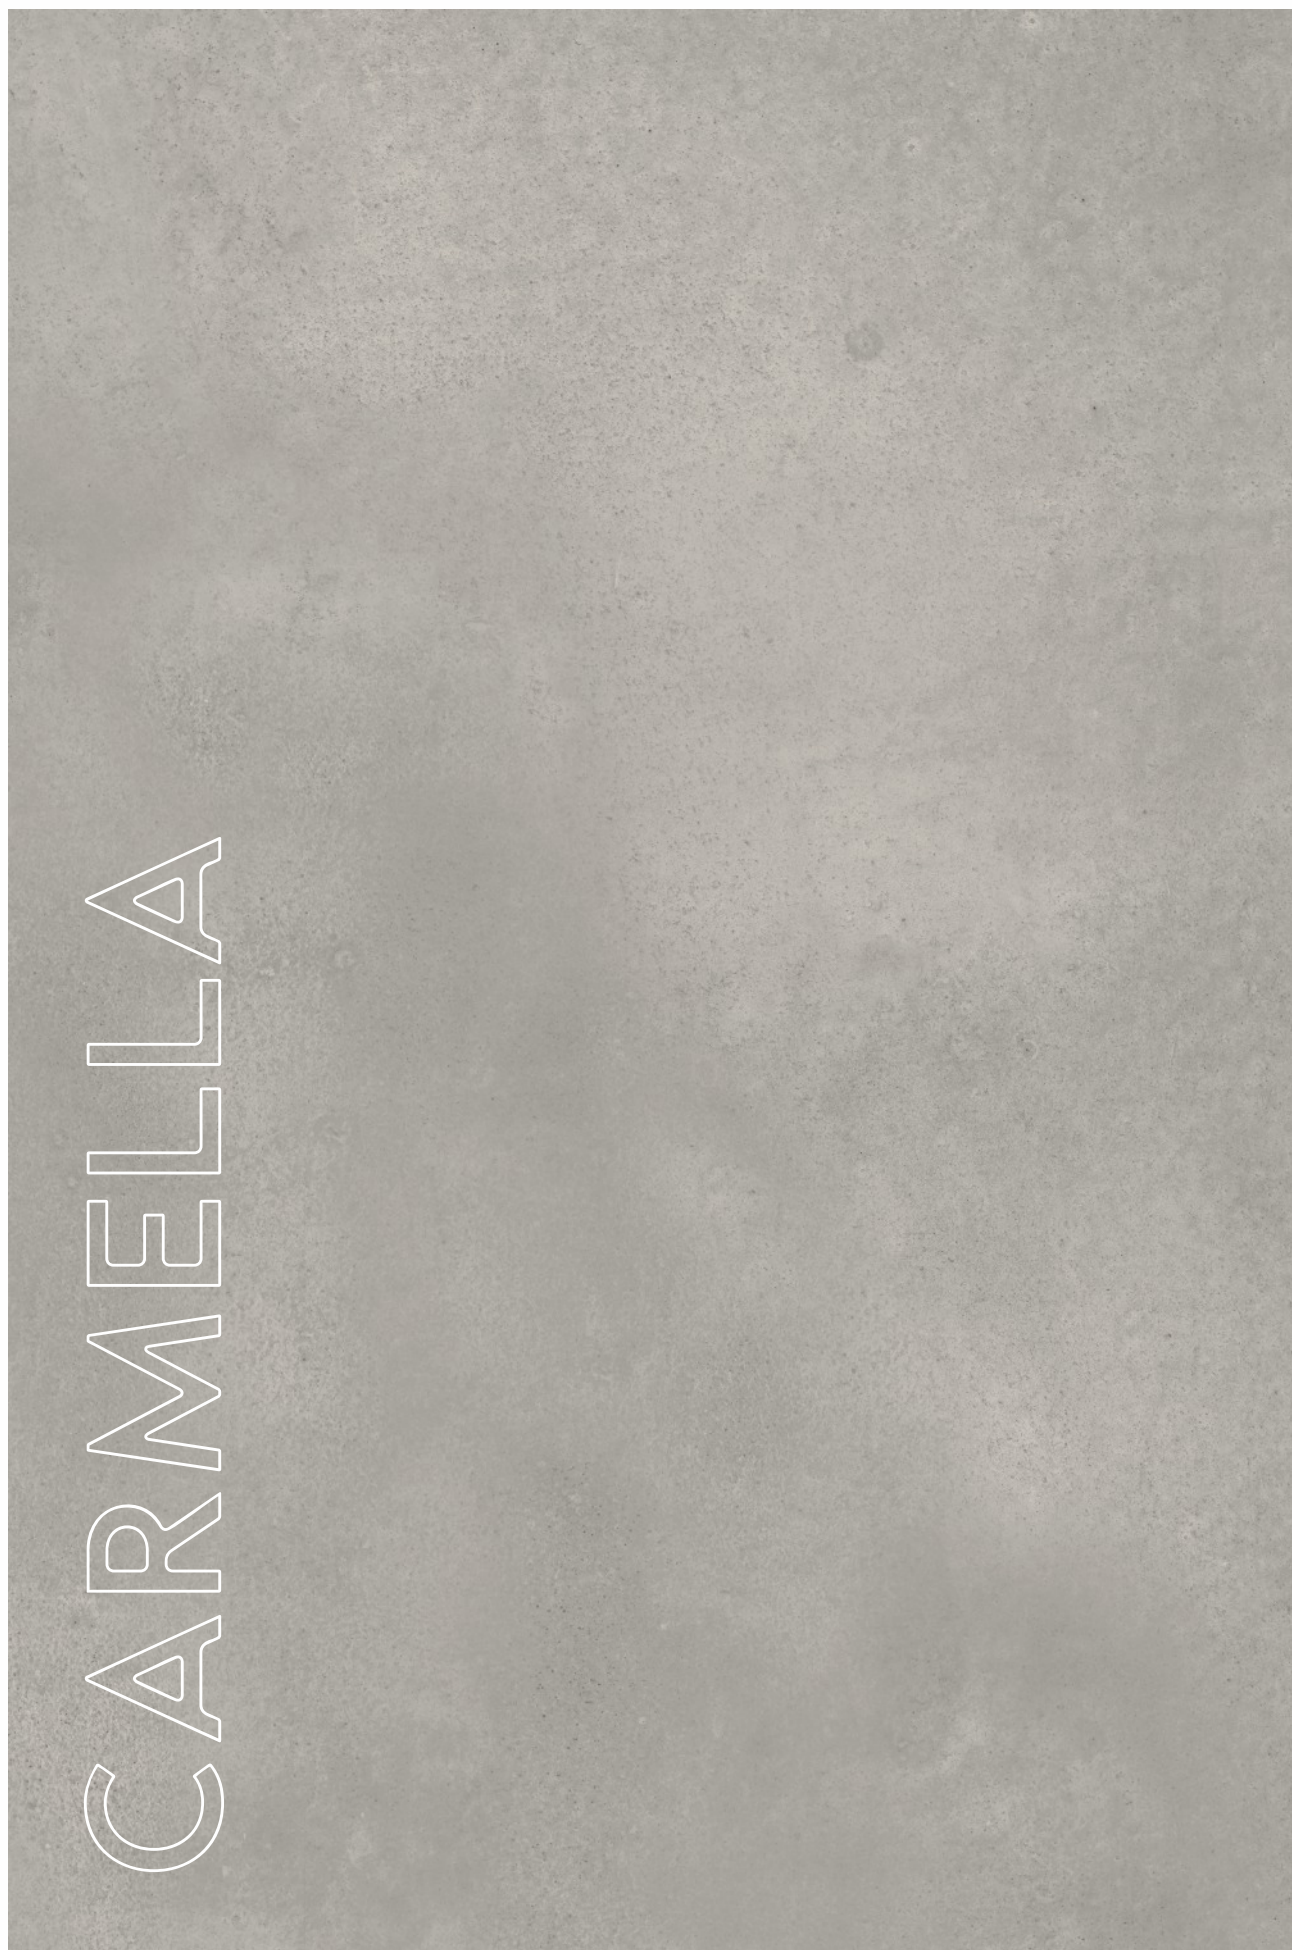

Carmella Gris



CARMELLA SERIES

05

COLOURS SHADES



Carmella Gris



CARMELLA CREMA



CARMELLA OLIVE



CARMELLA TOBACCO



CARMELLA SMOKE



CARMELLA GRIS

DYNAMIK

Dynamic Smoke



DYNAMIK SERIES

05

COLOURS SHADES



Dynamic Smoke



DYNAMIK CREMA



DYNAMIK BROWN



DYNAMIK BURLY

Dynamik Brown



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes

60x
60cm

60x
120cm



DYNAMIK BLANCO



DYNAMIK SMOKE

Dynamic Smoke & Blanco



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes

60x
60cm

60x
120cm

REVEN

Reven Gris



REVEN SERIES

05

COLOURS SHADES



Reven Gris



REVEN CREMA



REVEN ARENA



REVEN CALCE



REVEN GREY



REVEN GRIS

Reven Gris



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes

60x
60cm

60x
120cm

SYON

Syon Ash



SYON SERIES
05
COLOURS SHADES



Syon Ash



SYON IVORY



SYON KHAKHI



SYON CALCE

Syon Khakhi



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes





SYON SMOKE



SYON ASH

Syon Ash



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes

60x
60cm

60x
120cm



TOSCANA

Toscana Grey



TOSCANA SERIES

04

COLOURS SHADES



Toscana Grey



TOSCANA BONE



TOSCANA ASH

Toscana Bone



Flat Glazed Vitrified Tiles

SURFACES : Matt

Available sizes

60x
60cm

60x
120cm



TOSCANA BLANCO



TOSCANA GREY

VOYAGE

Voyage Silver



VOYAGE SERIES

05

COLOURS SHADES



Voyage Silver



VOYAGE CREMA



VOYAGE ALMOND



VOYAGE OAT



VOYAGE BLANCO



VOYAGE SILVER

Technical Specificaion



LAYING INSTRUCTION

Please read the following Instructions before Laying the Tiles

- 1) Variation in shade, color & pattern is natural features of ceramics, therefore we are advised you to purchase sufficient tiles at one time to complete the job.
- 2) First of all, before opening the boxes of tiles, please check manufacturing date, design name, color tone and batch. We advise to use the material having same batch and same date in a single date in a single room.
- 3) Please check the level of the prepared bed.
- 4) Slope should be given on the surface on which tiles are to be fixed for water preparing flow at the time of mortar bed. The mortar bed or surface on which tiles are to be fixed should be fine, smooth, dirt free & dust to avoid contamination.
- 5) Ceramic / Vitrified tiles have inherent property of color variation. So before laying please follow the instruction as below.

a) First of all, lay the tiles in room without applying cement mortar and observe the tiles for color tone & if some tiles does not match with others for color or size, please remove this and use for skirting purpose.

b) Please lay all tiles in such a way that “arrow behind the tiles” of “symbol of tiles” should remain in one direction in whole room.

c) To add beauty on the laid surface, gap of 3 to 4 mm spacers can be kept between to tiles.

d) Please fillup the joints between 2 tiles after 24 hours of lying.

e) After finishing the joint filling wipe out of excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be clean by mild acid.
- 6) Allow 3 to 4 days for bed drying.
- 7) Before doing cement or furniture work on laid tiles, we advise to plain plastic (without printed) with POP coating on it.
- 8) We appreciate your suggestions & views regarding the design, shade & color of tiles
- 9) Good suggestion & customer satisfaction will helpful to us making your home flooring a thing of beauty & pride.
- 10) Company cannot entertain any complain after laying the tiles.

MAINTENANCE GUIDELINES

STAINS (Created by)	SOLVENTS (Turpentine, Acetone, Trichloroethylene, etc.)	SODIUM HYPO CHLORATE (NOC)	ACIDS (Hydrochloric Acid*)	ALKALI (sodium Hydrocide Potassium Hydrocide)
BEVERAGE BEER				✓
JUICE		✓		
COLA				✓
COFFEE				✓
TEA	✓	✓		
INK BALLPEN	✓			
LIQUID INK	✓		✓	
MARKER INK	✓			
MISCELLANEOUS CEMENT			✓	
TAR	✓			
COLCAR			✓	
EDIBLE OIL	✓			
CIGARETTE			✓	
GLUE	✓			✓
ICE CREAM				✓
PAINTS	✓		✓	
RESINS	✓			
RUST			✓	
BLOOD				✓

GLAZE VITRIFIED TILES TECHNICAL SPECIFICATIONS

Sr. No	Characteristics	Method of Testing	Vitrified Tiles ISO 13006 / EN 176 Group Bla	Values
A	Dimension & Surface Quality			
1	Deviation in Length & Width	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
2	Deviation in Thickness	ISO 10545-2	+ / - 5.0%	+ / -2.0%
3	Straightness of Sides	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
4	Rectangularity	ISO 10545-2	+ / - 0.5 %	+ / - 0.1%
5	Surface Flatness	ISO 10545-2	+ / - 0.5%	+ / - 0.2%
6	Color Differences	ISO 10545-16	Unaltered	No Change
7	Surface Coating	Nano Machine	As Per Manufacturer Norms	Nano Polished
B	Physical Properties			
1	Water Absorption	ISO 10545-3	< 0.5%	0.08%
2	Flexural Strength (MOR)	ISO 10545-4	> 27 N / mm2	> 30 N / mm2
3	Mohs Hardness	EN 101	Min 6	6 Mohs
4	Flexural Breaking Strength	ISO 10545-4	> 1113 N	2350 N
5	Bulk Density (Gm / cc)	DIN 51082	>2 gm/cc	2.35 gm/cc
6	Glossiness	Glossometer	As Per Manufacturer Norms	Min 85 % reflection
7	Slip Resistance Coefficient of Friction	ISO 10545-17	> 0.4	> 0.6
8	Crazing Resistance	ISO 10545-11	Min 4 Cycle @ 7.5 Bar	Passes 4 Cycle
9	Resistance Of Surface Abrasion	ISO 10545-6	As Per Manufacturer Norms	> PEI I V
C	Chemical Properties			
1	Staining Resistance	ISO 10545-14	Resistant	Resistant
2	Household Chemicals	ISO 10545-13	No Damage	No Damage
D	Thermal Properties			
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage
2	Thermal Expansion	ISO 10545-10	9 x 10 - 6 max	6 x 10 -6
3	Moisture Expansion	ISO 10545 - 10	Nil	Nil

Note : Color shown are as accurate as the limitation of the printing process will allow. Prospective customers are advice to inspect a sample of the tile before ordering. Every efforts has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAILS

PRODUCT	SIZE	PCS/BOX	COVERAGE AREA	
SURFACE FGVT TILES	600 x 1200mm	2	1.44 SQ. MTR.	15.50 SQ. FT.
	600 x 600mm	4	1.44 SQ. MTR.	15.50 SQ. FT.